

Client: \_\_\_\_\_

Project name: \_\_\_\_\_

Order # \_\_\_\_\_

Type: \_\_\_\_\_ Qty: \_\_\_\_\_

## FEATURES AND BENEFITS

### Physical :


- Low copper content extruded aluminum housing
- Available in 1', 2', 3' or 4' sections
- Electro-statically applied polyester powder coat finish
- Aluminum end caps
- Stainless steel hardware
- Clear acrylic lens
- 10° x 10°, 10° x 60°, 30° x 60° or 60° x 60° optics
- Interior applications only

### Performance :


- Minimum 1fc (10.7 lux) @ 135 feet (41.1 m) distance (4000K, 10° x 60° optic, HO version)
- 2,883 delivered lumens and 18,094 candelas at nadir (4000K, 4' unit, 10° x 60° optic, HO version)
- Lumen maintenance L70 @ 25°C - 120,000 hrs
- Lumen measurements comply with LM - 79 - 08 standard
- Resolution per foot or per fixture (see page 8)
- Operating temperatures: -25°C to 50°C

### Electrical :

- Line voltage luminaire for 120 to 277 volts
- Power and data in 1 cable (#18-5)
- Up to 92 feet with a single 120V power feed, HO version
- 8.5W/ft (15.25W/ft HO version)
- 0-10 volt, DMX or DALI dimming options

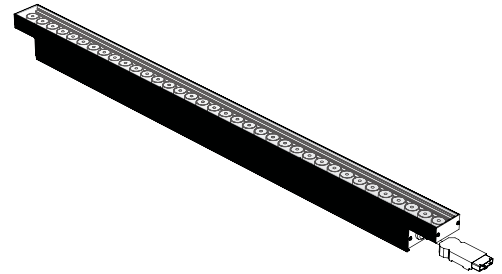

### Wiring detail - non dimming

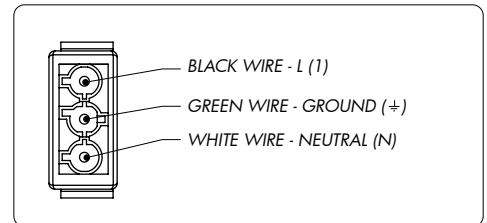

### Wiring detail - dimming

