

Client : _____

Project name : _____


Order # : _____

Type : _____ Qty. : _____

FEATURES & BENEFITS

Physical :

- Available in 1', 2', 3' or 4' sections
- PMMA extruded diffuser housing (lens)
- 120° x 80°
- IP68 (submersible up to 10ft, pool and fountain applications)
- Adjustable mounting is standard

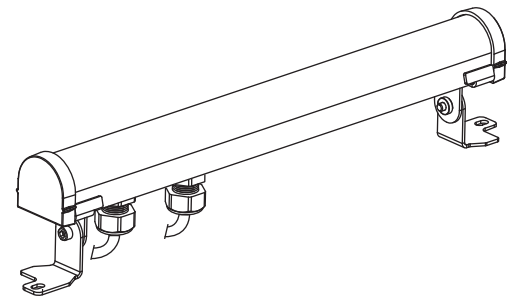


Performance :

- Lumen maintenance L70 @ 25°C - 80,000 hrs

Electrical :

- 24V DC luminaire, remote power & data supply available for 120 to 277V (required but not included, see page 3 for options)
- 5W/ft
- 2X 12ft cord (#18-2)
- DMX 512 ready

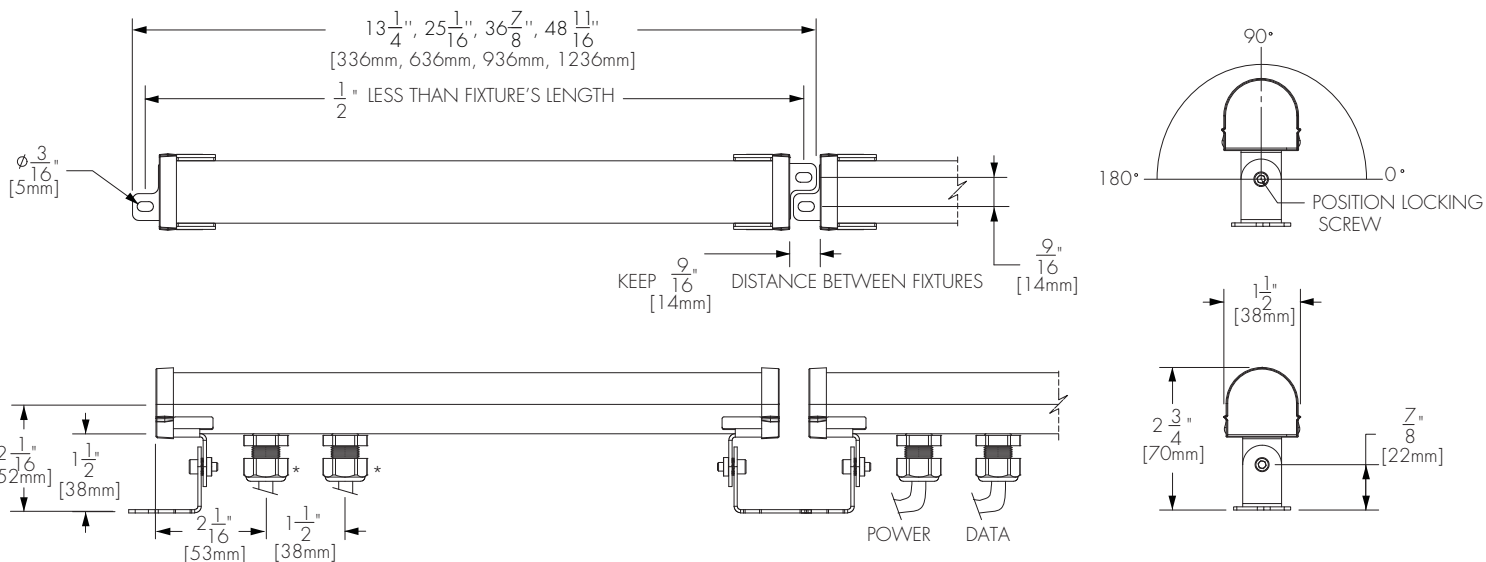

5 year warranty

*Cables to be protected from contact by use of suitable conduit.

ACCESSORIES

Order separately

Control Systems :

- LTO** Lumentouch is a wall mount DMX 512 controller keypad
- LCU** Lumencue is a USB / mini SD DMX 512 controller
- LID** LumenID is a serializing and addressing DMX 512 controller.
It must be specified on all DMX applications.
Refer to LID specification sheet for details.

CBOX60 & CBOX100 :

CBOX60-___V-___ Exterior Power & data box, 60W load maximum.
Data input and output, M20 provision holes with plugs.
Voltage input and output, M20 provision holes with plugs.
Up to two outputs to fixtures (24V DC & DMX), M20 provision holes with plugs.
Please specify desired input voltage and finish (SI - silver standard finish).
Refer to CBOX60 & CBOX100 specification sheets for details.

CBOX100-___V-___ Exterior Power & data box, 100W load maximum.
Data input and output, M20 provision holes with plugs.
Voltage input and output, M20 provision holes with plugs.
Up to six outputs to fixtures (24V DC & DMX), M20 provision holes with plugs.
Please specify desired input voltage and finish (SI - silver standard finish).
Refer to CBOX60 & CBOX100 specification sheets for details.

HOW TO ORDER

SLC Housing	24V Voltage	Length	RGB Colors and color temperatures
1	2	3	4

1

Housing :

SLC - Lumensub linear

2

Voltage :

*24V DC fixture. Refer to page 2 for remote power supply options.

3

Length :

- 12 - 13 1/4 inches (336mm) (0.20 kg/ 0.44 lbs)
- 24 - 25 1/16 inches (636mm) (0.40 kg/ 0.9 lbs)
- 36 - 36 7/8 inches (936mm) (0.60 kg/ 1.33 lbs)
- 48 - 48 11/16 inches (1236mm) (0.80 kg/ 1.78 lbs)

4

Colors and Color temperatures :

RGB - 16.7 million colors, additive RGB