



Project Name \_\_\_\_\_ Qty \_\_\_\_\_

Type \_\_\_\_\_ Catalog / Part Number \_\_\_\_\_

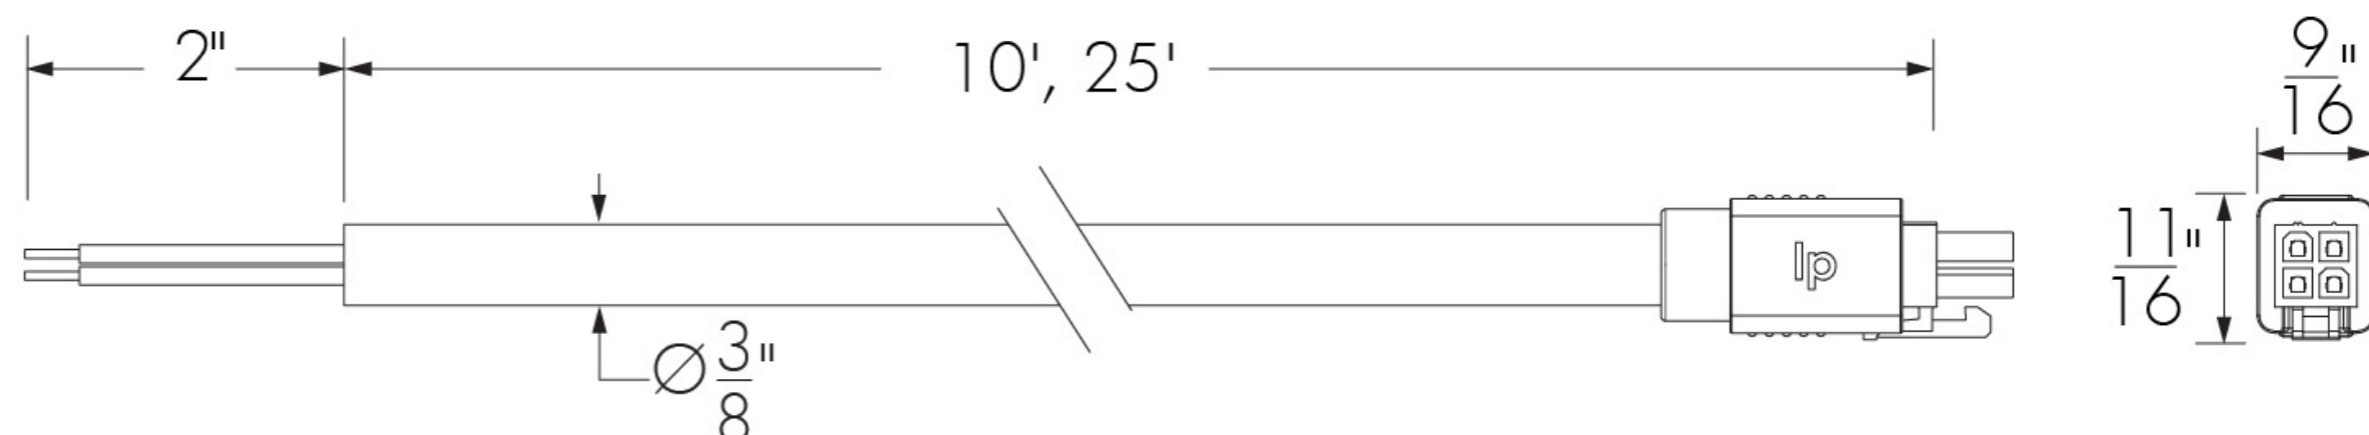

## Pin detail

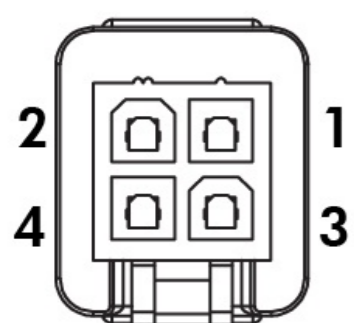

Male connector  
(female pins)

## Wiring color code

PIN ID	UL Color code	USE
1	Black	Line
2	White	Neutral
3	Red	Data +
4	Orange	Data -

## Certifications



## Features

<b>Length</b>	10 ft, 25 ft
<b>Warranty</b>	5-year limited warranty

## Electrical and control

<b>Voltage</b>	300 volts
<b>Control</b>	On/Off control, 0-10V dimming, DMX control, DALI dimming
<b>Connectors</b>	Thumb latch connectors (breakable under load), Male connector (female pin)
<b>Fixture Cable and Connector Color</b>	White
<b>Conductors</b>	4 conductors 16AWG (4 x 1,5 mm <sup>2</sup> )

## Environmental

<b>Storage Temperature</b>	-4 °F to 167 °F
<b>Operating Temperature</b>	-4 °F to 149 °F
<b>Environment</b>	Indoor applications only

## How to order

1	2	3	4	5	6

### 1 . Housing

**LCN2LC** Lumencove Nano 2.0 Leader Cable

### 2 . Certification

**UL** UL compliant <sup>(1)</sup>  
**CE** CE compliant

<sup>(1)</sup> Consult European specification sheet for CE pin detail.

### 3 . Voltage

**300 volts** 300 volts

### 4 . Control <sup>(1)</sup>

**NO** On/Off control  
**DIM** 0-10V dimming  
**DMX** DMX control  
**DALI** DALI dimming

<sup>(1)</sup> A Digital Data Bridge (DDB) is included with every leader cable specified for dimming applications. Choose from DIM, DMX or DALI to specify the input signal of the DDB.

### 5 . Length

**10FT** 10 ft  
**25FT** 25 ft

### 6 . Cable Color

**WH** White <sup>(1)</sup>

<sup>(1)</sup> Cable is provided with a white connector.