



Project Name \_\_\_\_\_ Qty \_\_\_\_\_

Type \_\_\_\_\_ Catalog / Part Number \_\_\_\_\_

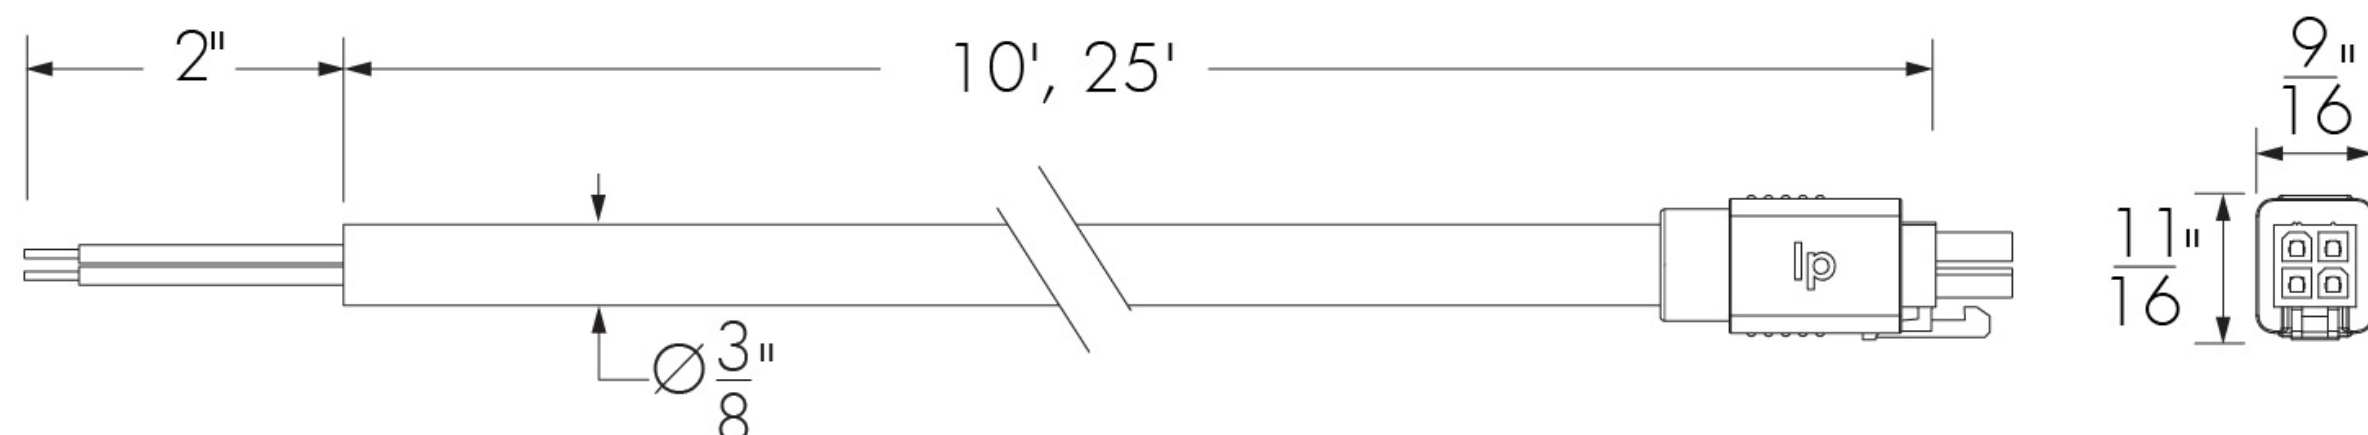

## Pin detail

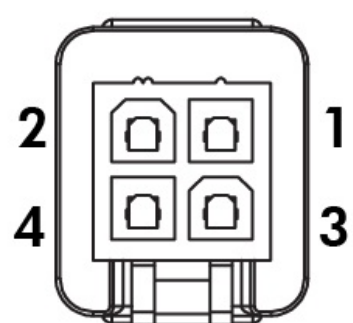

Male connector  
(female pins)

## Wiring color code

| PIN ID | UL Color code | USE     |
|--------|---------------|---------|
| 1      | Black         | Line    |
| 2      | White         | Neutral |
| 3      | Red           | Data +  |
| 4      | Orange        | Data -  |

## Certifications



## Features

|                    |                         |
|--------------------|-------------------------|
| <b>Length</b>      | 10 ft, 25 ft            |
| <b>Warranty</b>    | 5-year limited warranty |
| <b>Cable Color</b> | White                   |

## Electrical and control

|  |  |
|--|--|
| <b>Fixture Voltage</b>                   | 120 volts, 230 volts, 277 volts  |
| <b>Control</b>                           | On/Off control, 0-10V dimming, DMX control, DALI dimming                   |
| <b>Connectors</b>                        | Thumb latch connectors (breakable under load), Male connector (female pin) |
| <b>Fixture Cable and Connector Color</b> | White  |
| <b>Conductors</b>                        | 4 conductors 16AWG (4 x 1,5 mm <sup>2</sup> )                              |

## Environmental

|                              |                          |
|------------------------------|--------------------------|
| <b>Storage Temperature</b>   | -4 °F to 167 °F          |
| <b>Operating Temperature</b> | -4 °F to 149 °F          |
| <b>Environment</b>           | Indoor applications only |

## How to order

| 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|
|   |   |   |   |   |   |

### 1 . Housing

**ILCN2LC** Lumencove Nano 2.0 Leader Cable

### 2 . Certification

**UL** UL compliant <sup>(1)</sup>  
**CE** CE compliant

<sup>(1)</sup> Consult European specification sheet for CE pin detail.

### 3 . Voltage

**120/277** 120-277 volts

### 4 . Control <sup>(1)</sup>

**NO** On/Off control  
**DIM** 0-10V dimming  
**DMX** DMX control  
**DALI** DALI dimming

<sup>(1)</sup> A Digital Data Bridge (DDB) is included with every leader cable specified for dimming applications. Choose from DIM, DMX or DALI to specify the input signal of the DDB.

### 5 . Length

**10FT** 10 ft  
**25FT** 25 ft

### 6 . Cable Color

**WH** White <sup>(1)</sup>

<sup>(1)</sup> Cable is provided with a white connector.