

Client _____ Project name _____

Order# _____ Type _____ Qty _____

LEADER CABLE, LTW CONNECTOR


Physical :

- Available in 10', 25', 50', 100', 150' or 200' standard lengths.
Custom lengths available, consult factory.
- Available in 3m, 7.6m, 15.2m, 30m, 45m or 61m standard lengths.
Custom lengths available, consult factory.
- Available in black or white, consult factory for custom colors
- IP66

Electrical :


- Power and data in 1 cable (#16-5)
- Suitable for dimming/data and non-dimming applications

Connection Type: End-to-End (ETE)




Pin ID	American Color Code	CE Color Code	USE
1	Red	Black	0-10V / Data +
2	Orange	Grey	0-10V / Data -
3	Black	Brown	Live 100-277V
4	Green	Yellow/Green	Ground
5	White	Blue	Neutral

Connection Type: End-to-End (ETE)



Male connector
Female pin

FRONT VIEW

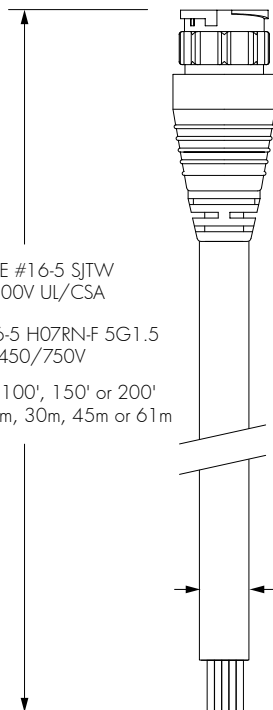

UL: CABLE #16-5 SJTW
105C 300V UL/CSA

CE: CABLE #16-5 H07RN-F 5G1.5
85C 450/750V


10', 25', 50', 100', 150' or 200'
3m, 7.6m, 15.2m, 30m, 45m or 61m

UL $\frac{3}{8}$ " [10mm] CE $\frac{7}{16}$ " [12mm]

TOP VIEW



HOW TO ORDER



1

Housing:

LXTLC - Leader cable for Lumencove® XT
(Sealing endcap is mandatory for any unused connector.
(1) included with every leader cable)

2

Certification:

UL - UL (certification covers Canada and the United States)
CE - CE (certification covers Europe Economic Area)

3

Length:

10FT - 10ft	3M - 3m
25FT - 25ft	7.6M - 7.6m
50FT - 50ft	15.2M - 15.2m
100FT - 100ft	30M - 30m
150FT - 150ft	45M - 45m
200FT - 200ft	61M - 61m

Custom lengths available, consult factory.

4

Cable Color:

BK - Black
WH - White
Consult factory for custom color availability.
Connectors are black.