

lumenpulse™



lumencore
short cylinders



Pendant Stem
Nano 9"



Pendant Cable
Nano 9"



Surface Mount
Nano 6"

GROWING SMALLER

These compact luminaires bring all the technological and aesthetic excellence of their larger counterparts, and are also enhanced with Opticolor+™ for dynamic color, tunable white, and Dim-to-Warm performance.

Perfect for more intimate architectural settings, the Short Cylinders deliver the same precision, consistency, and quality of light that define Lumenpulse, in a beautifully scaled-down form.

NEW GROUND

With a number of bezel and finish colors, and a choice of Pendant or Surface Mount, these Lumencore Cylinders continue to go where no Lumencore Cylinder has gone before.

The option of an integrated, remote, or surface-mount driver puts the Lumenpulse Lumencore Short Cylinder Nano and Small exactly where you want them to be. The remote driver can be placed more than 50' away, ensuring a low profile for the luminaire.




Lumencore Short Cylinder Nano Pendant, Cable Mount, 6"
Lumencore Short Cylinder Small Pendant, Cable Mount, 6"



Lumencore Short Cylinder Small Pendant,
Stem Mount, 6"

FAMILY MATTERS

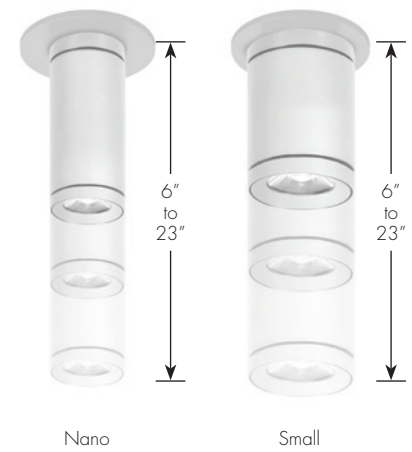


The Lumenpulse Lumencore Short Cylinder Nano and Small have all the market-leading performance that has made the Lumencore Cylinders family such a success, but in a smaller package. This includes the same array of optics, outputs, field-changeable accessories, and long-lifetime thermal design.

With the introduction of these luminaires, the Lumencore Cylinders family can now be scaled to more environments than ever before. Available in lengths from 6" to 23" with diameters of 2 3/4" to 8", Lumencore Cylinders are the most versatile product family on the market.


REAL PERFORMERS

These luminaires unlock a world of possibilities with 3-in-1 Opticolor+™ technology powered by Optidrive™, uniting RGBW color, Dynamic White, and Dim-to-Warm in one refined form. Control-agnostic and performance-driven, they deliver up to 2000 lm and 2200–4000 K, offering designers signature light—precise, warm, and vibrant.

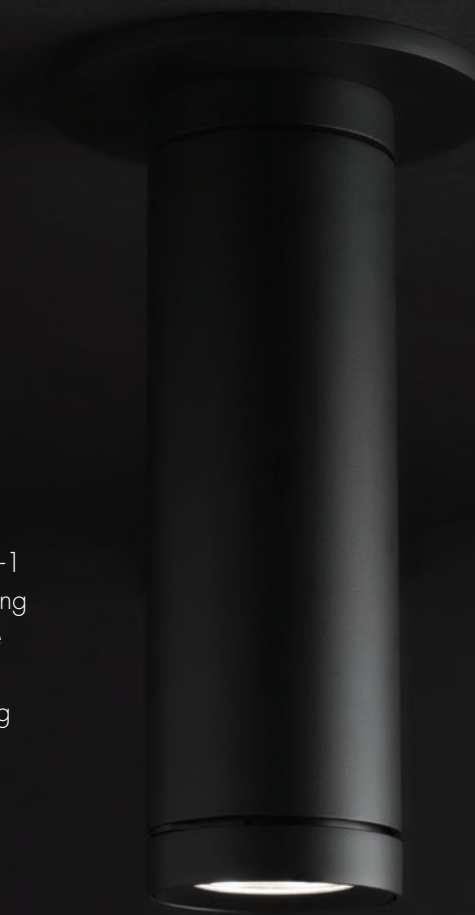

Luminaire Short Cylinder Nano
Surface Mount, 9"

Optics

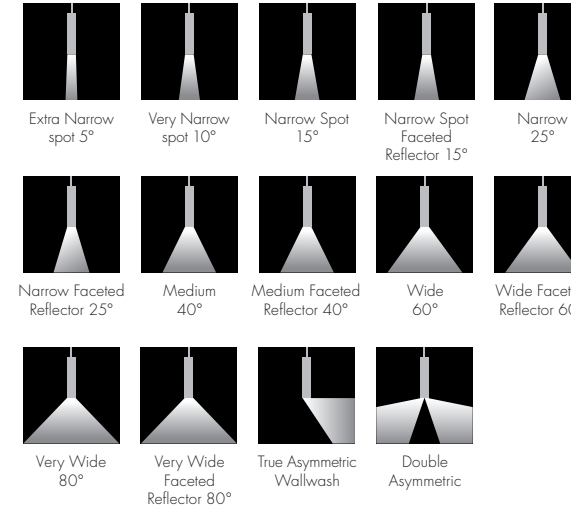

Color temperatures




Color Rendering

80+ | 90+ | 95+

FEATURES & OPTIONS

Mounting

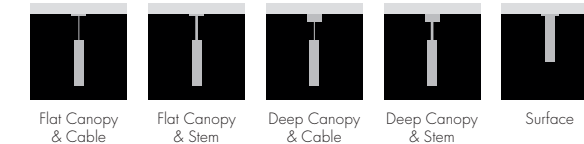

Installation Type



Sizes



Outputs

700lm | 1000lm | 1300lm | 2000lm

Control Options

- On/Off Control
- DAMC, 0-10V 1%, or Pro 0-10V 0.1% (linear or logarithmic)
- Phase Dimming
- Phase Dimming 1%
- Lutron® Hi-lume Premier 0.1% EscoSystem® PEQO Soft-on/Fade-to-Black
- DALI 1% or Pro DALI 0.1% (linear or logarithmic)
- DALI-2 Type 8
- DMX/RDM
- **lumen talk**

NOTE: Options vary according to model. Consult Specification Sheets.

LITTLE WONDER

At 6" and 9" in length, with diameters of 2 3/4" and 4", field-changeable accessories, and a number of bezel and finish colors, it's little wonder the Lumencore Short Cylinder Nano and Small can accent any aesthetic and be right at home in lower ceiling situations.




SNOOT




HALF SNOOT



DECORATIVE
RING



CONCENTRIC
RING LOUVER



HONEYCOMB
LOUVER



PRISMATIC
DIFFUSER



CLEAR GLASS
LENS



SOFTENING
GLASS LENS



LINEAR SPREAD
LENS NARROW



LINEAR SPREAD
LENS WIDE



BEAM WIDENING
LENS (+10°)



BEAM WIDENING
LENS (+20°)



BEAM WIDENING
LENS (+30°)

Lumencore Short Cylinder Opticolor+ Nano
Surface Mount, 9"

LUMENCORE SHORT CYLINDERS

Pendant (Cable and Stem)



Lumencore Short
Cylinder
Nano Pendant



Lumencore Short
Cylinder Opticolor+
Nano Pendant



Lumencore Short
Cylinder
Small Pendant




Lumencore Short
Cylinder Opticolor+
Small Pendant

Surface Mount



Lumencore Short
Cylinder
Nano Surface Mount



Lumencore Short
Cylinder Opticolor+
Nano Surface Mount



Lumencore Short
Cylinder
Small Surface Mount



Lumencore Short
Cylinder Opticolor+
Small Surface Mount

Lumencore Short Cylinder Small Pendant,
Stem Mount, 6"



Corporate Headquarters

1220 Marie-Victorin Blvd.
Longueuil, QC
J4G 2H9 Canada

T +1.877.937.3003
T +1.514.937.3003
F +1.514.937.6289

US Headquarters

14 Beacon Street, 3rd Floor
Boston, MA
02108 United States

T +1.877.937.3003
T +1.617.307.5700
F +1.617.350.9912

info@lumenpulse.com
www.lumenpulse.com

© Lumenpulse™

2025 / 10

139125_REV 6

