# **lumenpulse**<sup>™</sup>



lumenquad versatility squared







There is versatility, then there is versatility squared. The Lumenquad is well-rounded but squared to smoothly fuse with every architecture, site, and environment. The Lumenquad family has more added benefits than ever before.







# More Design

This includes dynamic colour-changing, IK10 rating, Lumencool dual-chamber systems—meaning the power supply and LEDs are in separate chambers to ease maintenance and increase longevity and, of course, every Lumenquad is IP66 weather-ready.

# **More Mountings**

Hidden cables, clean pole-mounting integration, arms available at the optimal setback for wallwash optics, and a new pivot with a broader range of adjustment and locking.

# More Seamless Accessory Integration

Easy, in-the-field accessory swaps so your designs can keep up with the times. Every accessory has been designed with seamlessness in mind, adhering to the fixture's shape for the best integration possible while keeping the hardware practically unseen.

# More Optical Options

Numerous roadway distributions, as well as Narrow Asymmetric, Asymmetric Wallwash, and Narrow Spot optics for any number of applications. Narrow beams have an emphasis on candelas, while wider beams emphasize lumens—more light precisely where you want it.







# IK10

IK10 is the world's highest impact rating for luminaires and electrical enclosures.

STANDARD

## **IP66**

IP66 enclosed fixtures offer protection against particles and water.

STANDARD

## CRC

Our long-term corrosion inhibitor protects and preserves the metal surfaces of our fixtures.


**OPTIONAL** 

The convection system channels cool air across the Lumenquad's integrated heatsink.

# More Design

Our innovative, dual-chamber thermal design system, Lumencool™, is an integral part of every Lumenquad. This proprietary technology allows air to flow between the driver and LED board, increasing both output and longevity.

In line with Lumenpulse's core principles, the dual-chamber design improves the sustainability of your system and prolongs your luminaire's life. Should you ever need to, this lets you replace the power supply chamber instead of the entire luminaire.

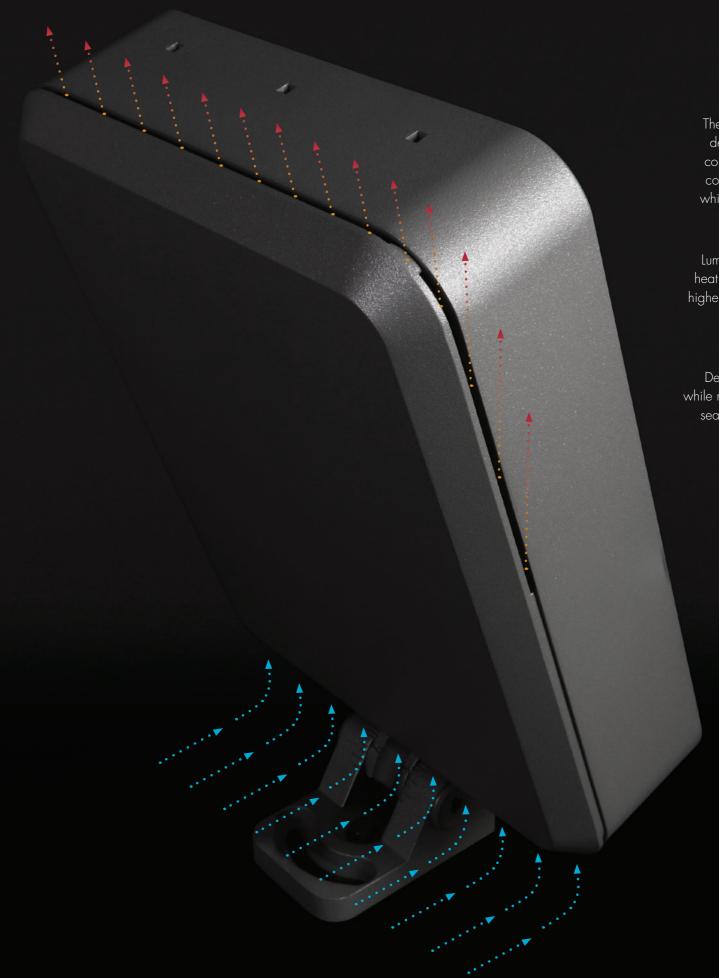

ol (\*

The stealthy, nearly invisible design of the Lumenquad's convection system channels cool air across the heatsink while keeping water at bay.



Lumencool raises the bar on heat management, achieving higher lumen outputs, a longer life and better efficiency.



Wate



Designed to run the rain off while maintaining a completely sealed IP66-rated luminaire.






# **More Light**

We are continually pushing the boundaries of LED lighting to give you consistently strong outputs. No matter what the application or project, our latest technological innovations have been designed to maximize the Lumenquad's performance. Lumenquad fixtures have LED lifetimes of L70 B50 > 250,000 hrs (at 25 °C) and L80 B10 100,000 hrs (at 25 °C) allowing you to maintain more light for a longer time.

When narrow spotlighting or accenting is required, our optical system prioritizes intensity to ensure crisp and accurate, punchy beams of up to 1,032,800 candelas. When lighting a uniform surface or a wallwash is a must, our design gives you outstanding efficacies of up to 124 lumens per watt.

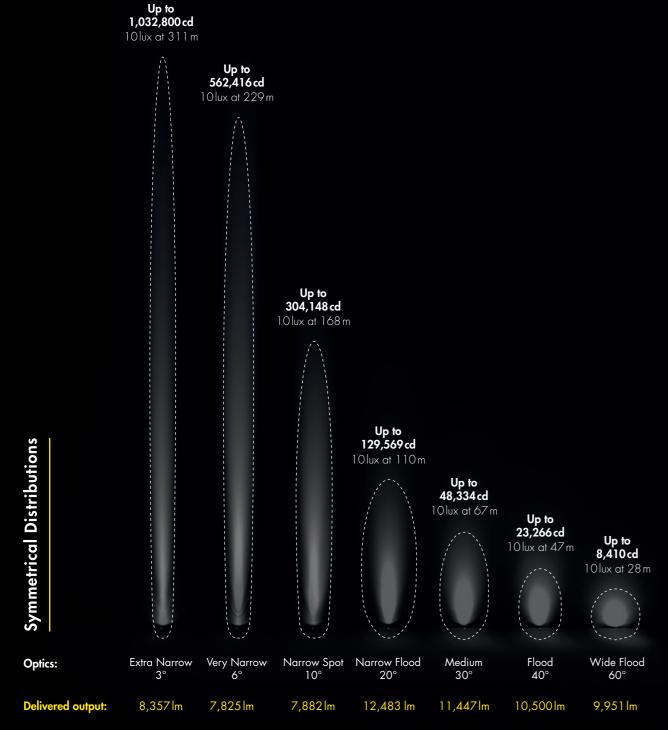


Type II Type II + Backlight Shield 10,177 lm 5,512lm 108,502 cd Type III Type III ME2-ME6, CE + Backlight Shield 10,568 lm 5,939lm **Asymmetrical Distributions** Roadway Distributions Type IV ME2-ME6, CE, S for area and square lighting Type IV 25,111 cd + Backlight Shield 4,870 lm 9,321 lm Type VS Asymmetric Wallwash Narrow 10,184lm Asymmetric

Performances of Lumenquad Grande 4000K. Please consult our website for our complete library of photometric files.

20

# **TOP OF THEIR GAME**

We know what it's like to reach for the top. We also know what it is like to be at the top. Our luminaires featuring Extra Narrow 3° optics are bringing one foot candle (1fc) of intensity to new heights.

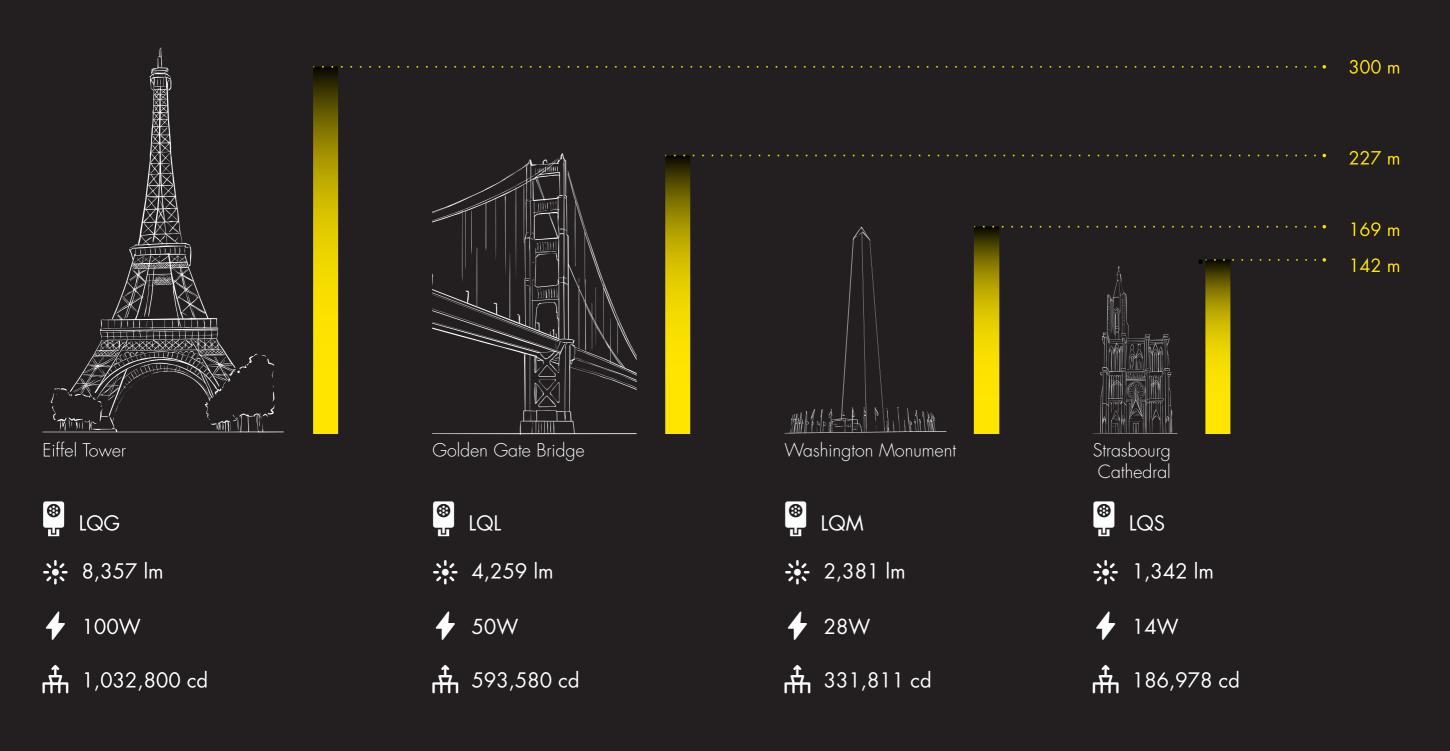



# Seeing Stars

Simultaneously keep your clients seeing stars of amazement while also helping them meet LEED certification and lowering their environmental impact. The stellar precision and uniformity of our luminaires lets you light more with less, saving you energy costs, as well as lowering light trespass and obtrusive light on neighbouring buildings, parks, and the dark sky.

# The Backlight Shield Keeps spill from the surrounding environment and light exactly where you need it.

24 2:





# More Seamless Accessory Integration

Seamless thinking is our design team's obsession. The fluid integration and ease of "in-the-field" installation are what makes Lumenquad's accessories noticeable yet natural. Even if you can't see it, there's magic around every corner of the Lumenquad.

















# **More Mounting Options**

Lumenquad luminaires can be mounted wherever your design desires. Different architectures, sites, and environments have different requirements, we've designed our mounting options so that you can rest assured, light will land where you planned it to land.

nenquad Grande, Type II + IV Wall Uplight: Lumenquad Large, Wallwash
Wall Down: Lumenquad Large, Narrow Asymmetric
Sign: Lumenquad, Narrow Flood
Trees: Lumenquad Small, Flood
Path: Lumenquad Large, Type II + Backlight Shield






Ideal for projection, this mounting can also be used with a recessed junction box.



### **Surface Mount**

The best way to keep the lowest profile. Ideal for ceilings and restricted spaces.



## Wall Arm Mount

Mount multiple lengths to create the right setback for your designs.



## Stake Mount

Corrosion-resistant stake, perfect for in-ground installations.



## Pole Mount

Pole and tenon mountings that safely set the luminaire overhead.



Opticolor+™ unleashes dynamic Colour Changing, Dynamic White, Dim-to-Warm, and Static White in one powerful luminaire. Powered by Optidrive™, it delivers bold, vibrant colour output with the precision and flexibility to transform any architectural space.



From Warm to Wild—Master Your Light

# **More Versatility**

For every design there is an optic, for every architecture, a mounting option. For every installation, a control. For every ambience, a colour temperature. For every height, an output. For every design there is a Lumenquad that can be personalized, whether it be dramatic accentuation or discreet floodlighting.



















Wide Flood 60° Very Wide Flood 90°



















































3500K 4000K 5700K









2200K - 3000K 2700K — 6500K

ON/OFF

1-10V

DALI

**₽**DMX**rdm** 

lumen talk

























Bronze Sandtex®





Silver Sandtex®











Dww





Options vary according to model. Consult specification sheets.



## Lumenquad Small







White

Dynamic White

Colour Changing

## Lumenquad Medium







White

Dynamic White

Colour Changing

# Lumenquad Large







White

Dynamic White

Colour Changing

## Lumenquad Grande







White

Dynamic White

Colour Changing

# **lumenpulse**

## **Corporate Headquarters**

1220 Marie-Victorin Blvd. Longueuil, QC J4G 2H9 Canada

T +1.877.937.3003 T +1.514.937.3003

© Lumenpulse™

3