


Project Name


Qty

Type


Catalog / Part Number

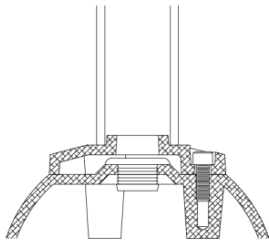

P3 - Pendant Small
(3-Bolt Tenon Adaptor)

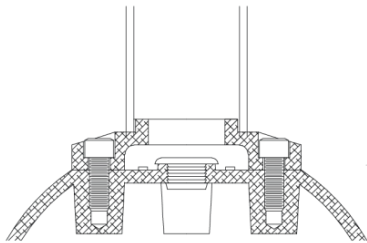

P4 - Pendant Medium
(4-Bolt Tenon Adaptor)

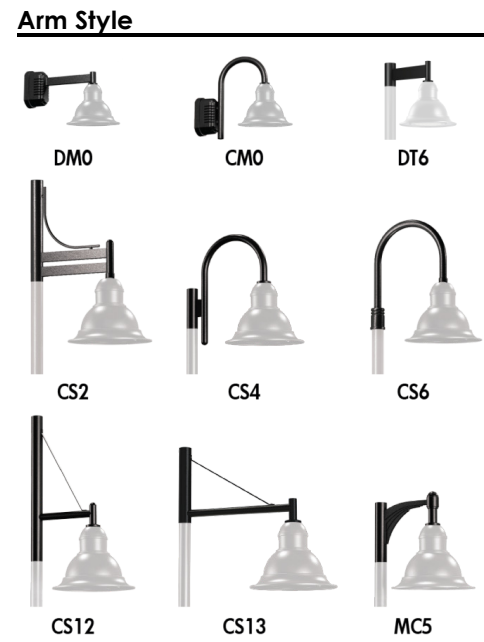

Configurations

W1X

Wall Mounting Arm

S1X

Variable Height Mounting Arm

S1E

Single Tenon Mounting Arm

S2E

Double Tenon Mounting Arm

Certifications



EPA Table - Round Pole Shape

P3 - Pendant Small (3-Bolt Tenon Adaptor) Round Arm Style EPA

Arm Style	Arm Configurations				
		W1X 	S1X 	S1E 	S2E 
CM0	EPA	0.81 sq.ft.	N/A		
	Weight	5.23 lbs.			
DM0	EPA	0.73 sq.ft.			
	Weight	5.63 lbs.			
DT6	EPA	0.52 sq.ft.	0.52 sq.ft.	0.51 sq.ft.	1.03 sq.ft.
	Weight	5.1 lbs.	5.1 lbs.	8.1 lbs.	12.1 lbs.
CS2	EPA	1.8 sq.ft.	1.8 sq.ft.	2.87 sq.ft.	4.9 sq.ft.
	Weight	7.39 lbs.	7.39 lbs.	21.04 lbs.	31.65 lbs.
CS4	EPA	0.87 sq.ft.	0.87 sq.ft.	1.08 sq.ft.	1.97 sq.ft.
	Weight	9.03 lbs.	9.03 lbs.	14.88 lbs.	23.36 lbs.
CS6	EPA	N/A	N/A	0.93 sq.ft.	1.43 sq.ft.
	Weight			16.23 lbs.	25.88 lbs.
CS12	EPA	0.43 sq.ft.	0.43 sq.ft.	1.61 sq.ft.	2.08 sq.ft.
	Weight	8.44 lbs.	8.44 lbs.	35.2 lbs.	43.04 lbs.
CS13	EPA	0.69 sq.ft.	0.69 sq.ft.	1.98 sq.ft.	2.23 sq.ft.
	Weight	10 lbs.	10 lbs.	16 lbs.	23 lbs.
MC5	EPA	1.84 sq.ft.	1.84 sq.ft.	2.07 sq.ft.	3.23 sq.ft.
	Weight	15.2 lbs.	15.2 lbs.	16.25 lbs.	27.13 lbs.

P4 - Pendant Medium (4-Bolt Tenon Adaptor) Round Arm Style EPA

Arm Style	Arm Configurations				
		W1X 	S1X 	S1E 	S2E 
DT6	EPA	1.12 sq.ft.	1.12 sq.ft.	1.13 sq.ft.	2.10 sq.ft.
	Weight	5.1 lbs.	5.1 lbs.	8.1 lbs.	12.1 lbs.
CS2	EPA	1.83 sq.ft.	1.83 sq.ft.	3.02 sq.ft.	6.04 sq.ft.
	Weight	7.39 lbs.	7.39 lbs.	21.04 lbs.	31.65 lbs.
CS4	EPA	1.33 sq.ft.	1.33 sq.ft.	2.11 sq.ft.	3.53 sq.ft.
	Weight	9.03 lbs.	9.03 lbs.	14.88 lbs.	23.36 lbs.
CS6	EPA	N/A	N/A	1.52 sq.ft.	2.79 sq.ft.
	Weight			16.23 lbs.	25.88 lbs.
CS12	EPA	0.38 sq.ft.	0.38 sq.ft.	1.95 sq.ft.	2.39 sq.ft.
	Weight	5.17 lbs.	5.17 lbs.	35.2 lbs.	43.04 lbs.
CS13	EPA	1.05 sq.ft.	1.05 sq.ft.	1.84 sq.ft.	2.81 sq.ft.
	Weight	11 lbs.	11 lbs.	16 lbs.	23 lbs.
MC5	EPA	1.84 sq.ft.	1.84 sq.ft.	1.84 sq.ft.	3.68 sq.ft.
	Weight	15.2 lbs.	15.2 lbs.	16.25 lbs.	27.13 lbs.

EPA Table - Square Pole Shape

P3 - Pendant Small (3-Bolt Tenon Adaptor) Square Arm Style EPA


Arm Style	Arm Configurations				
		W1X 	S1X 	S1E 	S2E 
CM0	EPA	0.81 sq.ft.	N/A		
	Weight	5.23 lbs.			
DM0	EPA	0.73 sq.ft.			
	Weight	5.63 lbs.			
DT6	EPA	0.52 sq.ft.	0.52 sq.ft.	1.25 sq.ft.	1.88 sq.ft.
	Weight	5.1 lbs.	5.1 lbs.	8.1 lbs.	12.1 lbs.
CS2	EPA	1.8 sq.ft.	1.8 sq.ft.	4.4 sq.ft.	6.23 sq.ft.
	Weight	7.39 lbs.	7.39 lbs.	21.04 lbs.	31.65 lbs.
CS4	EPA	0.87 sq.ft.	0.87 sq.ft.	1.68 sq.ft.	2.25 sq.ft.
	Weight	9.03 lbs.	9.03 lbs.	14.88 lbs.	23.36 lbs.
CS12	EPA	0.43 sq.ft.	0.43 sq.ft.	4.31 sq.ft.	4.65 sq.ft.
	Weight	8.44 lbs.	8.44 lbs.	35.2 lbs.	43.04 lbs.
CS13	EPA	0.69 sq.ft.	0.69 sq.ft.	2.5 sq.ft.	3.1 sq.ft.
	Weight	10 lbs.	10 lbs.	16 lbs.	23 lbs.
MC5	EPA	1.84 sq.ft.	1.84 sq.ft.	2.41 sq.ft.	3.26 sq.ft.
	Weight	15.2 lbs.	15.2 lbs.	16.25 lbs.	27.13 lbs.

P4 - Pendant Medium (4-Bolt Tenon Adaptor) Square Arm Style EPA


Arm Style	Arm Configurations				
		W1X 	S1X 	S1E 	S2E 
DT6	EPA	1.12 sq.ft.	1.12 sq.ft.	1.71 sq.ft.	2.78 sq.ft.
	Weight	5.1 lbs.	5.1 lbs.	8.1 lbs.	12.1 lbs.
CS2	EPA	1.83 sq.ft.	1.83 sq.ft.	5.1 sq.ft.	7.4 sq.ft.
	Weight	7.39 lbs.	7.39 lbs.	21.04 lbs.	31.65 lbs.
CS4	EPA	1.33 sq.ft.	1.33 sq.ft.	2.95 sq.ft.	4.78 sq.ft.
	Weight	9.03 lbs.	9.03 lbs.	14.88 lbs.	23.36 lbs.
CS12	EPA	0.38 sq.ft.	0.38 sq.ft.	4.44 sq.ft.	4.93 sq.ft.
	Weight	5.17 lbs.	5.17 lbs.	35.2 lbs.	43.04 lbs.
CS13	EPA	1.05 sq.ft.	1.05 sq.ft.	2.64 sq.ft.	3.36 sq.ft.
	Weight	11 lbs.	11 lbs.	16 lbs.	23 lbs.
MC5	EPA	1.84 sq.ft.	1.84 sq.ft.	2.67 sq.ft.	3.8 sq.ft.
	Weight	15.2 lbs.	15.2 lbs.	16.25 lbs.	27.13 lbs.

P3 - Pendant Small (3-Bolt Tenon Adaptor) Arm Style Dimensions


CM0 Arm Style

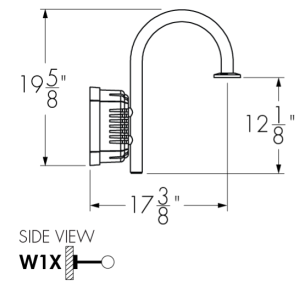


CS2 Arm Style

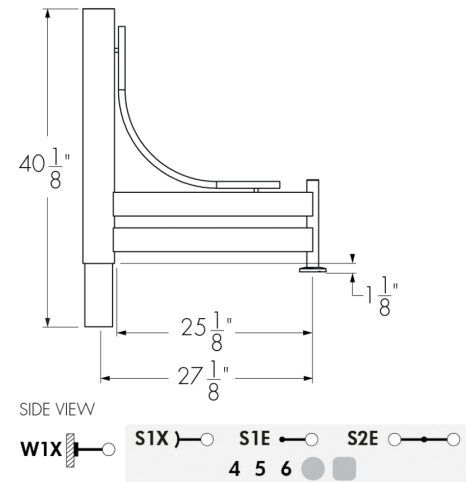


CS12 Arm Style

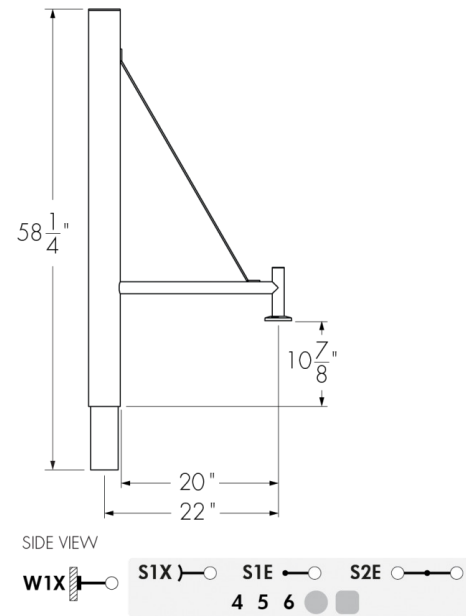


DM0 Arm Style




CS4 Arm Style

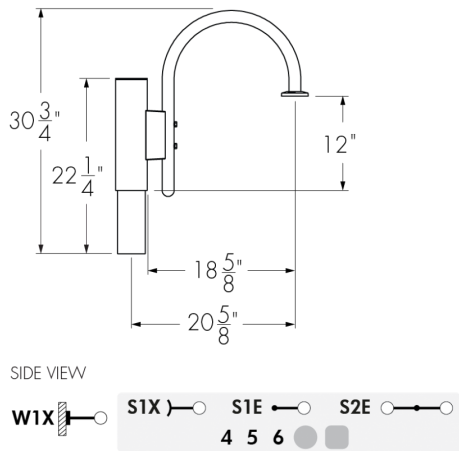


CS13 Arm Style

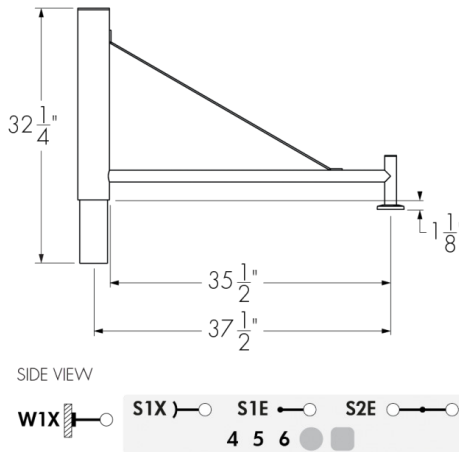


DT6 Arm Style

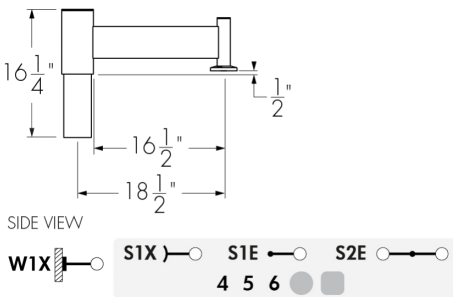

CS6 Arm Style

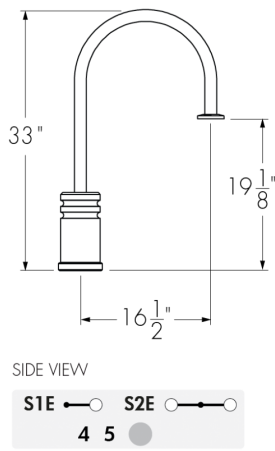


MC5 Arm Style

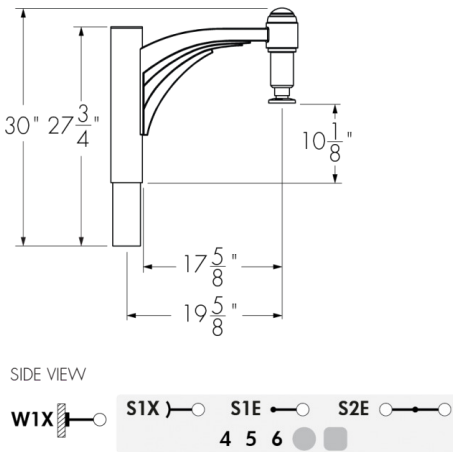


- Mid-pole/mid-luminaire distance is bases on 4 in pole (add 1/2 in for 5 in pole and 1 in for 6 in pole).

P4 - Pendant Medium (4-Bolt Tenon Adaptor) Arm Style Dimensions


DT6 Arm Style

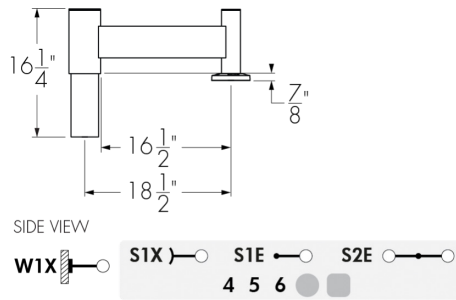


CS2 Arm Style

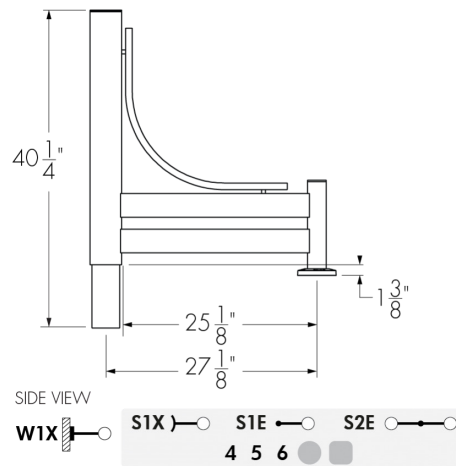


CS4 Arm Style

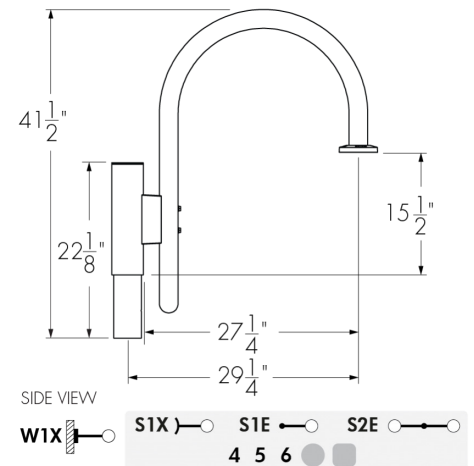


CS6 Arm Style

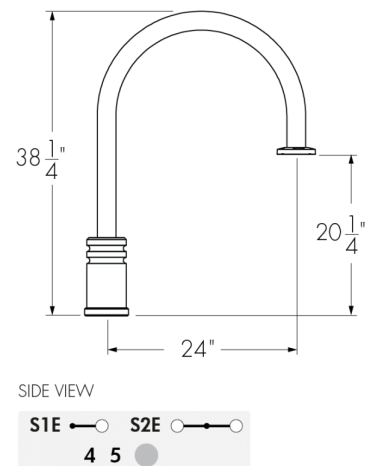


CS12 Arm Style

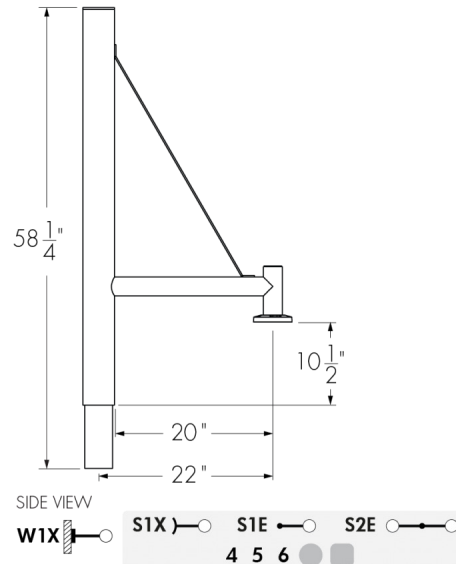

CS13 Arm Style

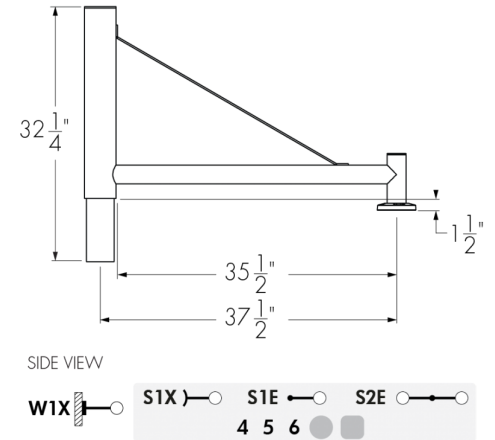


MC5 Arm Style

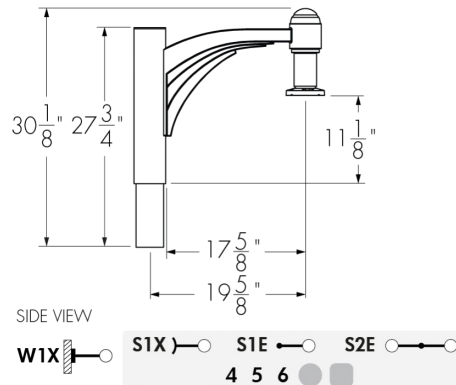


- Mid-pole/mid-luminaire distance is based on 4 in pole (add 1/2 in for 5 in pole and 1 in for 6 in pole).

Wall Mounting Arm (W1X) Configuration Mounting Plate Details


CM0 and DM0 Arm Style Mounting Plate

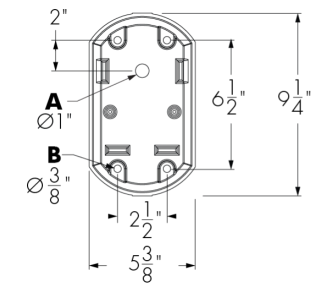


DT6 and CS4 Arm Style Mounting Plate




CS2 and CS12 Arm Style Mounting Plate

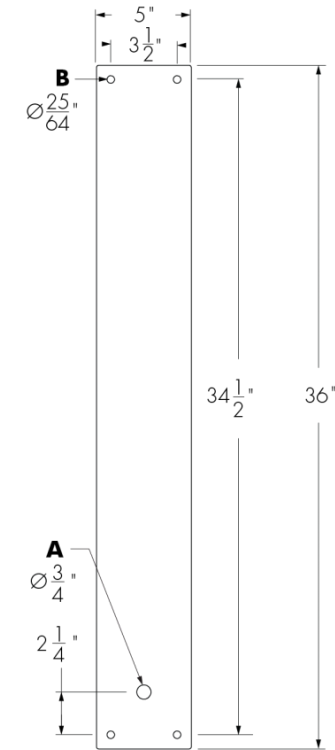

CS13 Arm Style Mounting Plate

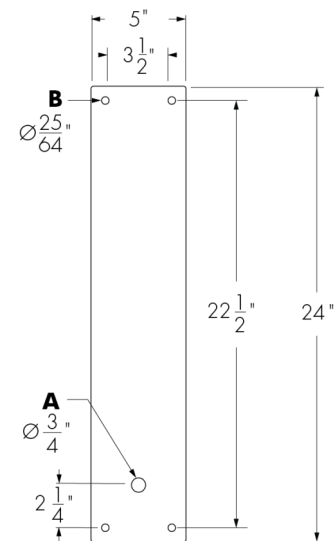

MC5 Arm Style Mounting Plate

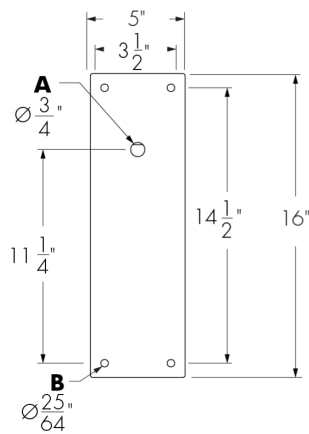


- A - Wire-Feeding Location
B - (4x) Ø3/8-16 Bolts (not included)


- Choose an electrical box of appropriate dimensions.

Variable Height Mounting Arm (S1X) Configuration Mounting Plate Details


DT6 Arm Style Mounting Plate

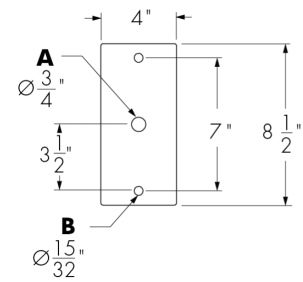


CS4 Arm Style Mounting Plate




CS2 and CS12 Arm Style Mounting Plate

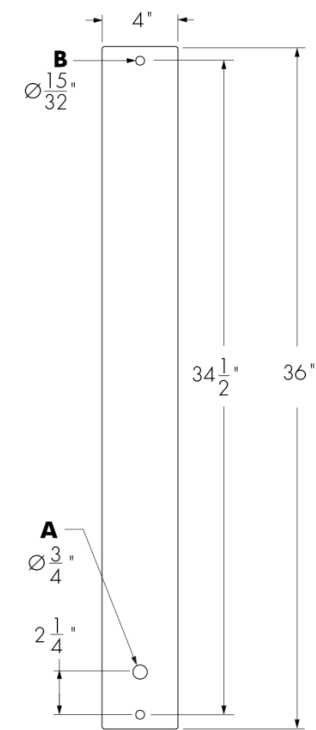

CS13 Arm Style Mounting Plate

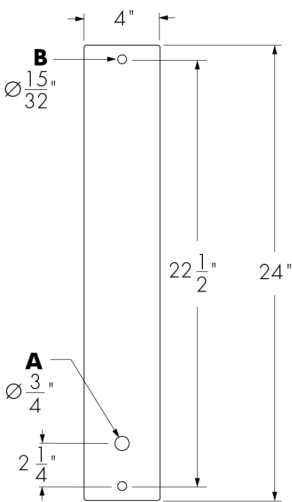


MC5 Arm Style Mounting Plate

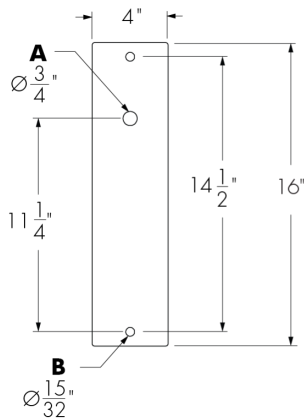

- A - Wire-Feeding Location
B - Straight and Muffler Pole: (2x) Ø3/8-16 Thru Bolts (included)
Lumentech Smart Pole: (2x) Ø7/16-14 Bolts (included)


Luminaire Mounting Option Details - Luminaire/Arm style Junction

P3 - Pendant Small (3-Bolt Tenon Adaptor)

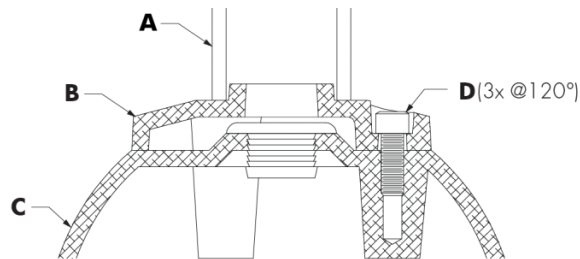

- A - Decorative Arm
- B - 3-Bolt Tenon Adaptor
- C - Luminaire
- D - (3x) $\varnothing 1/2$ in x 1 in Bolt (included with luminaire). $\varnothing 2 1/2$ in Bolt Circle


P4 - Pendant Medium (4-Bolt Tenon Adaptor)

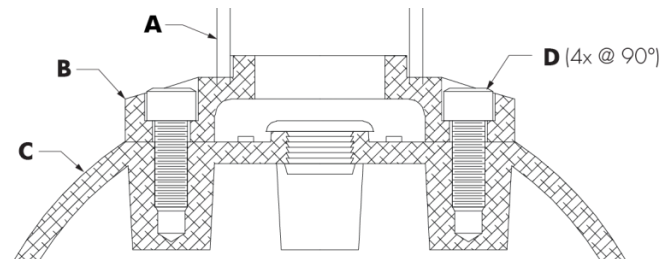

- A - Decorative Arm
- B - 4-Bolt Tenon Adaptor
- C - Luminaire
- D - (4x) $\varnothing 3/8$ in x 1 in Bolt (included with luminaire). $\varnothing 3 3/4$ in Bolt Circle

Pole Top Options Details - Arm Style/Decorative Pole Junction


BRK - Drilling Pattern for Decorative Arms *

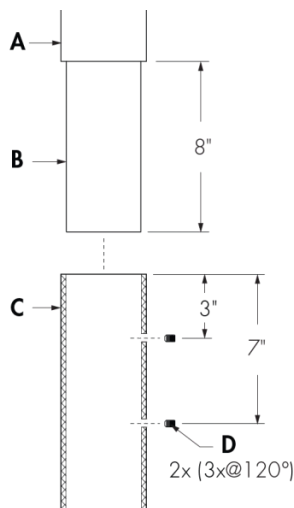

- A - Decorative Arm
- B - Internal Adaptor
- C - Pole
- D - $\varnothing 5/16$ in Set Screw (included with the pole)

* Required for DT6, CS2, CS4, CS6 (except S1E on 4 in pole), CS12, CS13 and MC5 arm style with S1E and S2E configurations.

CS6 Arm Style with S1E Configuration on 4 in Pole

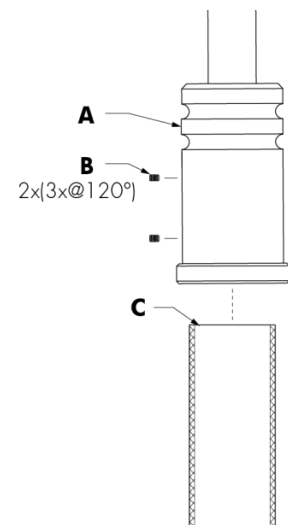


- A - Decorative Arm
- B - $\varnothing 5/16$ in Set Screw (included with the arm)
- C - Pole Bracket end Slip Fits 6 in Deep onto Pole

Options

SPR5 and SPR7 - 5-Pin and 7-Pin Receptacles



SPR5 SC and SPR7 SC - 5-Pin and 7-Pin Receptacles with Shorting Cap



- Dimming receptacle meets ANSI C136.41 Standard

How to order

Arm	Luminaire Mounting Options ⁽¹⁾	Arm Style	Arm Configuration	Pole Dimension ^{(7) (8)}	Pole Shape ^{(7) (8)} ⁽¹¹⁾	Pole Wall Thickness ^{(7) (8)} ⁽¹²⁾	Pole Top Options	Finish	Options
ARM-P Decorative Arm for Pendant-Mount Luminaire	P3 Pendant Small (3-Bolt Tenon Adaptor) P4 Pendant Medium (4-Bolt Tenon Adaptor) ⁽²⁾	CM0 Arm style CM0 DM0 Arm style DM0 DT6 Arm style DT6 CS2 Arm style CS2 CS4 Arm style CS4 CS6 Arm style CS6 ⁽³⁾ CS12 Arm style CS12 CS13 Arm style CS13 MC5 Arm style MC5	W1X Wall Mounting Arm ⁽⁴⁾ S1X Variable Height Mounting Arm ⁽⁵⁾ S1E Single Tenon Mounting Arm ⁽⁶⁾ S2E Double Tenon Mounting Arm ⁽⁶⁾	4 4 in Straight or Muffler Pole 5 5 in Straight or Muffler Pole 6 6 in Straight or Muffler Pole 5T 5 in Lumentech Pole ^{(9) (10)} 6T 6 in Lumentech Pole ⁽¹⁰⁾ 8T 8 in Lumentech Pole ⁽¹⁰⁾	R Round S Square	L 1/8 in M 3/16 in H 1/4 in W 5/16 in	BRK Drilling Pattern for Decorative Arms ^{(13) (14)}	BK Black Sandtex® BRZ Bronze Sandtex® SI Silver Sandtex® BKTX Textured black BRZTX Textured bronze non-metallic GRATX Textured medium gray GRNTX Textured green WHTX Textured white CC Custom color and finish (please specify RAL color) ^{(15) (16) (17)}	CRC Corrosion-resistant coating for hostile environments SPR5 5-Pin Receptacle ^{(18) (19) (20)} SPR5 SC 5-Pin Receptacle with Shorting Cap ^{(18) (19) (20)} SPR7 7-Pin Receptacle ^{(18) (19) (20)} SPR7 SC 7-Pin Receptacle with Shorting Cap ^{(18) (19) (20)} PB Photoelectric Cell Button Type ⁽²¹⁾

Notes:

1. Refer to luminaire Specification Sheet for Luminaire Mounting Options informations.

2. Available with DT6, CS2, CS4, CS6, CS12, CS13 and MC5 Arm Style only.

3. Pole Wall Thickness not required with overlap Arm Style (S1E Arm Configuration when combined with 4 in Pole Dimension).

4. Available with CM0, DM0, DT6, CS2, CS4, CS12, CS13 and MC5 Arm Style only.

5. Available with DT6, CS2, CS4, CS12, CS13 and MC5 Arm Style only.

6. Available with DT6, CS2, CS4, CS6, CS12, CS13 and MC5 Arm Style only.

7. The Decorative Arm must be compatible with the chosen Decorative Pole to insure optimal fit of the Pole/Arm junctions. Refer to Pole specification sheet and Area Lighting Pole Guide for details prior to completing the Decorative Arm product code.

8. Pole informations required for S1X, S1E and S2E only (Pole Wall Thickness not required for S1X configuration)

9. Lumentech 5 in pole available with round shape only.

10. Available with S1X Arm Configuration only.

11. Consult factory for availability with fluted shape poles.

12. Pole wall thickness available with Straight and Muffler pole only.
13. Drilling Pattern for Decorative Arm option need to be selected in Decorative Pole product code if required by the Decorative Arm product code. Refer to Decorative Pole specification sheet and Area Lighting Pole Guide for details prior to completing the Decorative Arm product code.

14. Drilling Pattern for Decorative Arm option required for DT6, CS2, CS4, CS6 (except S1E configuration for 4 in pole), CS12, CS13 and MC5 Arm Style.

15. Specify RAL number followed by "TX" for textured finish (ex: RAL9007TX) or STX for Sandtex finish (ex: RAL9007STX). Textured or Sandtex finishes are recommended for the durability of all products. If a finish is not specified with the RAL number (ex: RAL9007), a glossy finish will be provided. Please consult factory for other RAL textures and glosses, or to match alternate color charts. Final color matching results may vary.

16. Setup charges apply for RAL colors. Consult factory for details.

17. Longer lead times can be expected for custom RAL color finishes.

18. Not available with W1X and S1X configurations.

19. Only one Receptacle or Photoelectric Cell can be specified per fixture.

20. Available with DT6, CS2, CS4, CS12, CS13 and MC5 Arm Style only.

21. Available with CM0 and DM0 Arm Style only.